


ISO 9001 CERTIFIED



**AWWA BUTTERFLY VALVES**

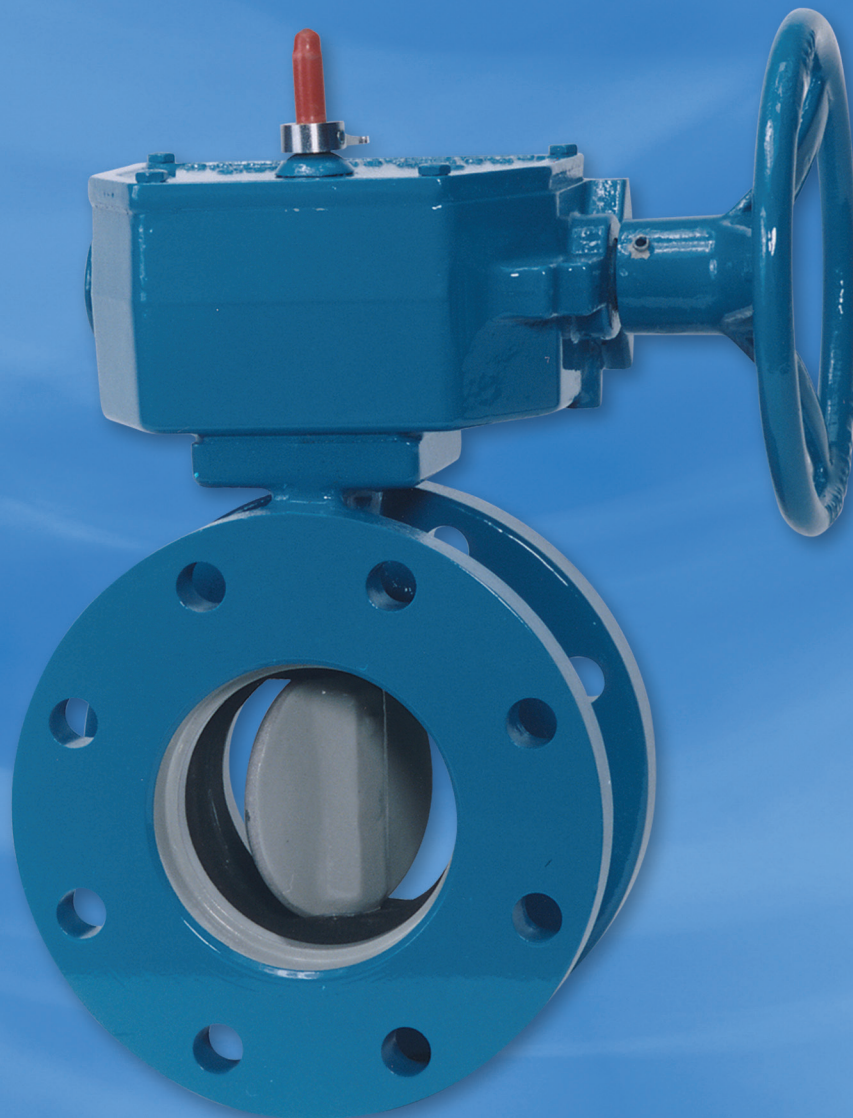

### **3" through 20" Butterfly Valves**

#### Scope of Line

511A Flanged — 3" through 20" ..... 3

510A Mechanical Joint — 4" through 20" ..... 3

Design Details ..... 4

Features and Benefits — 20" and smaller ..... 5

Cv Values — 20" and smaller ..... 5

Suggested Specifications — 20" and smaller ..... 6

#### Dimensions

511A Flanged — 3" through 20" ..... 7

510A Mechanical Joint — 4" through 20" ..... 7

Actuator Dimensional Data — 20" and smaller ..... 8

Optional Accessories ..... 8

### **24" and Larger Butterfly Valves**

#### Scope of Line

511 Flanged — 24" through 72" ..... 9

510 Mechanical Joint — 24" through 48" ..... 9

Features and Benefits — 24" and larger ..... 9

#### Dimensions

511 Flanged — 24" through 72" ..... 10

510 Mechanical Joint — 24" through 48" ..... 10

Suggested Specifications — 24" and larger ..... 11

## Scope of Line: AWWA Rubber Seated Butterfly Valves



Model 511A Butterfly Valve

### Model 511A Flanged Butterfly Valve

**Sizes:** 3 through 20 inches

**Body Style:** Flanged x flanged ends

**Pressure Class:**

- Class 150B per AWWA Standard C504

**Working Pressure:** 150 psig

**Flanges:**

- Flat faced and drilled in accordance with ANSI B16.1, Class 125 standards.

**Rubber Seat:** Bonded seat-in-body

**Actuation Options:**

- MDT manual actuator with AWWA nut, handwheel or chainwheel
- Hydraulic or pneumatic cylinder
- Electric actuator

### Model 510A Mechanical Joint Butterfly Valve

**Sizes:** 4 through 20 inches

**Body Style:** MJ x MJ ends

**Pressure Class:**

- Class 150B per AWWA Standard C504

**Working Pressure:** 150 psig

**Rubber Seat:**

- Bonded seat-in-body extends over inner surface to form self-gasketing feature

**Actuation Options:**


- MDT manual actuator with AWWA nut



Model 510A Butterfly Valve

Please see the outside back cover for a listing of other Milliken products

## Design Details: Models 511A and 510A — 20" and Smaller

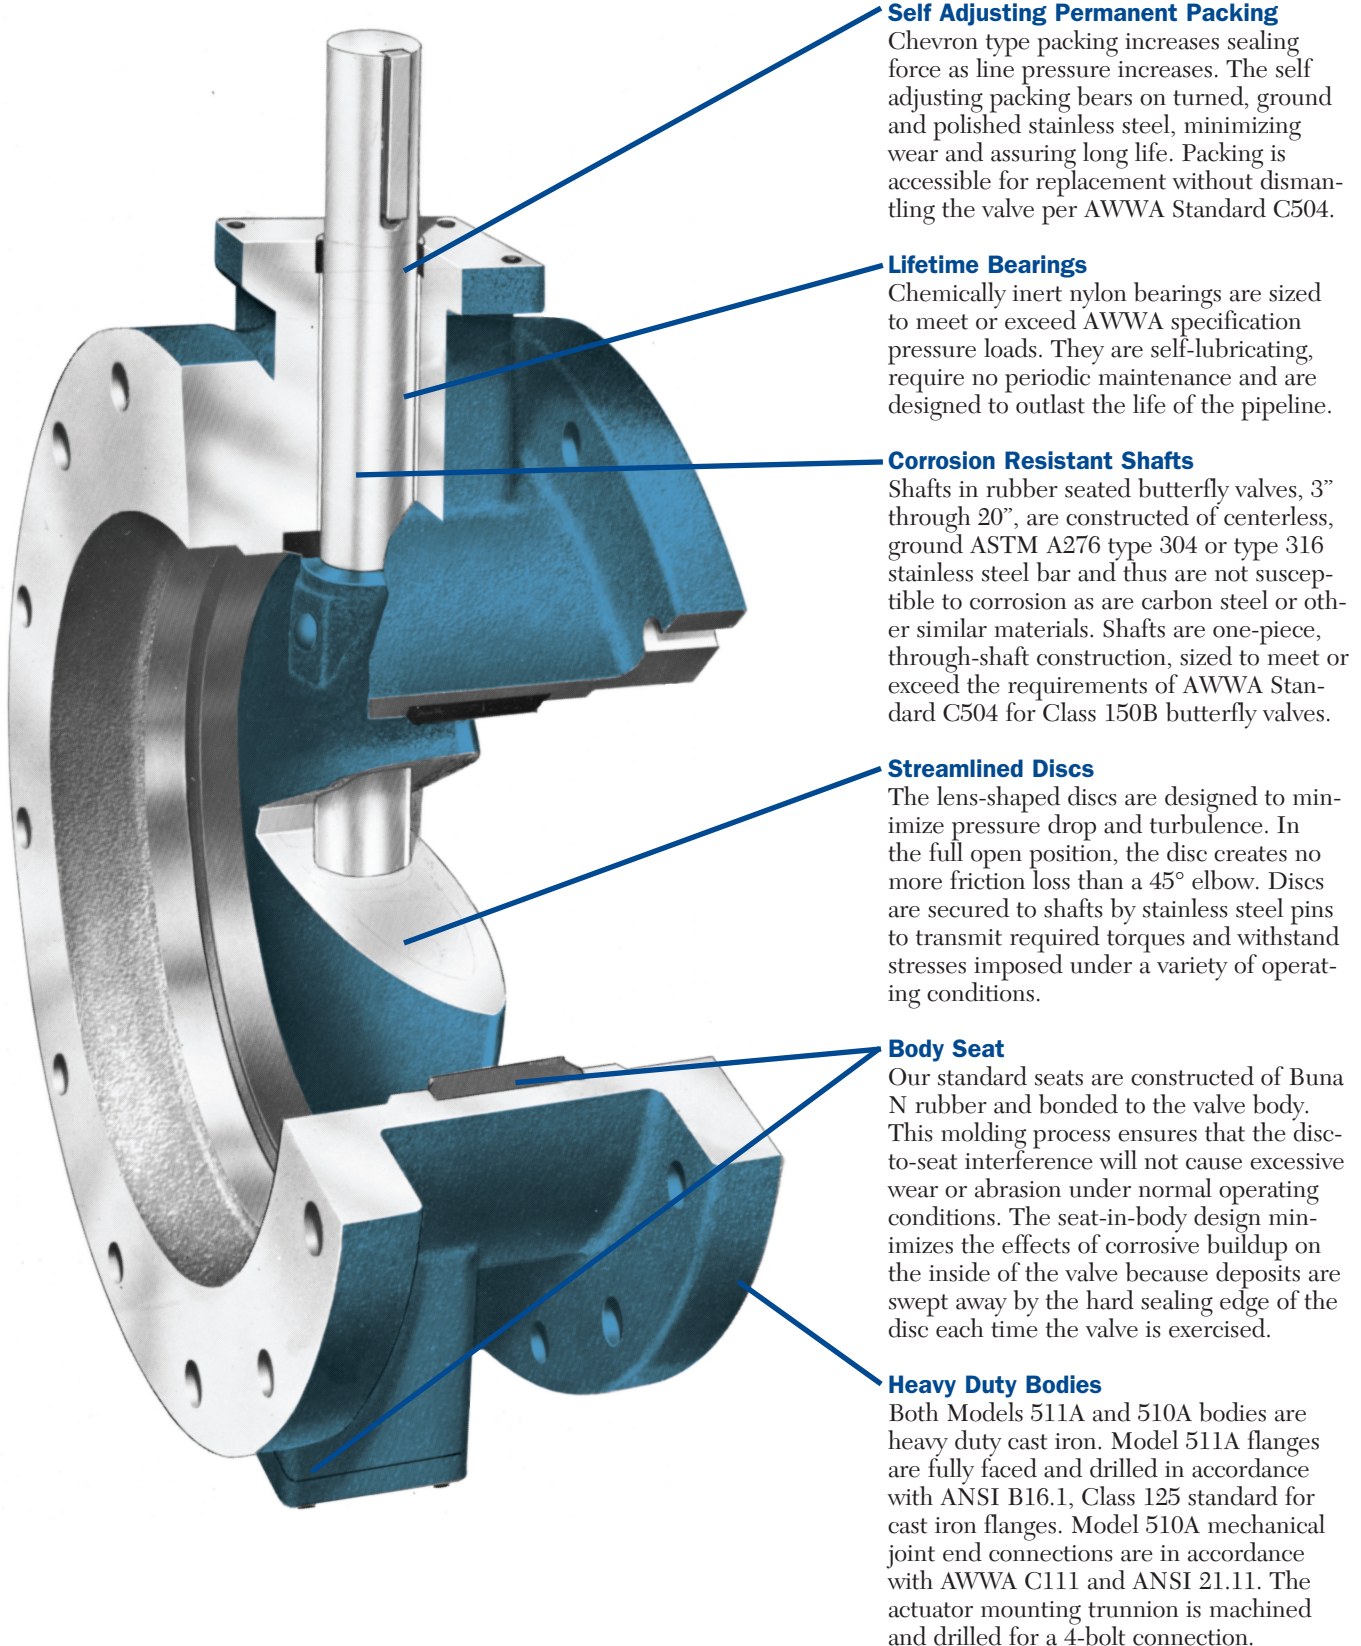

## Features and Benefits of Milliken Models 511A and 510A — 20" and Smaller

### Feature

Seat-in-body design  
Seat molded in recessed body cavity,  
protected by metal on 3 sides

Valve withstood proof-of-design testing  
of 100,000 cycles - AWWA only requires  
10,000 cycle proof-of-design testing

Through-disc pinning

Symmetrical lens-shaped disc

Nonmetallic bearings

Chevron V-type packing

### Benefit

- Reduces seat failure due to corrosive buildup in the valve and pipeline. No hardware to loosen. No periodic maintenance required. Rubber protected from flow media to increase seat life.
- Proven reliability over the life of the valve
- Provides a tight disc-to-shaft pin connection, greatly reducing the possibility of loosening through vibration
- Higher  $C_v$  : lower head loss results in energy savings for customer's system
- Prevents galvanic corrosion and provides lower coefficient of friction
- Self-adjusting, lasts the life of the valve

Valve Size	$C_v$	Valve Size	$C_v$	Valve Size	$C_v$
3"	323	10"	4458	16"	11413
4"	575	12"	6420	18"	14444
6"	1294	14"	8738	20"	17832
8"	2300	C <sub>v</sub> values for the 511A and 510A in the full open position			

Valve Size	Type of Material		
	Body	Disc	Shaft
3" - 4"	Ductile Iron	CF-8M	Type 304SS
6"	Cast Iron	CF-8M	Type 304SS
8" - 20"	Cast Iron	Cast Iron/316SS Edge	Type 304SS

Other materials available upon request

# Suggested Specification for the Milliken Rubber Seated Butterfly Valve, Sizes 3 through 20 inches

## General

Butterfly valves shall be manufactured in accordance with the latest revision of AWWA C504, Class 150B and conform to NSF Standard 61. The manufacturer shall have produced AWWA butterfly valves for a minimum of five years. All valves shall be either 511A Flanged or 510A Mechanical Joint and comply with the following details.

## Valve Bodies

Valve bodies shall be constructed of ASTM A126, Class B cast iron. Flanged valves shall be fully faced and drilled in accordance with ANSI Standard B16.1, Class 125. Mechanical joint end connections are in accordance with AWWA C111 and ANSI 21.11.

## Valve Seats

Rubber body seats shall be of one piece construction, simultaneously molded and bonded into a recessed cavity in the valve body. Seats may not be located on the disc or be retained by segments and/or screws.

## Valve Bearings

Valve bearings shall be of a self-lubricating, non-metallic material to effectively isolate the disc-shaft assembly from the valve body. Metal-to-metal thrust bearings in the flow stream are not allowed.

## Valve Disc

The disc shall be a lens-shaped design to afford minimal pressure drop and line turbulence. Materials of construction shall be:

- 3"-6" — ASTM A351 Gr. CF8M stainless steel disc
- 8"-20" — ASTM A126, Class B cast iron disc with a stainless steel type 316 edge

Discs shall be retained by stainless steel pins which extends through the full diameter of the shaft to withstand the specified line pressure up to valve rating and the torque required to operate the valve. Disc stops located in the flow stream are not allowed.

## Valve Shafts

Valve shafts shall be of stainless steel type 304. At the operator end of the valve shaft, a packing gland utilizing "V" type chevron packing shall be utilized.

## Painting

All surfaces of the valve interior shall be clean, dry and free from grease before painting. The valve interior and exterior, except for disc edge, rubber seat and finished portions shall be evenly coated with a 2-part liquid epoxy to comply with NSF61 and AWWA Standard C504.

## Testing

Hydrostatic and seat leakage tests shall be conducted in strict accordance with AWWA Standard C504.


## Proof of Design

The manufacturer furnishing valves under the specification shall be prepared to provide Proof of Design Test reports to illustrate that the valves supplied meet the design requirements of AWWA C504.

**Manual Actuators:** Manual actuators shall be of the traveling nut, self-locking type and shall be designed to hold the valve in any intermediate position between fully open and fully closed without creeping or fluttering. Actuators shall be equipped with mechanical stop-limiting devices to prevent overtravel of the disc in the open and closed positions. Actuators shall be fully enclosed and designed to produce the specified torque with a maximum pull of 80 lb. on the handwheel or chainwheel. Actuator components shall withstand an input torque of 450 Lb. Ft. at extreme operator position without damage. Manual actuators shall conform to AWWA C504 and shall be Milliken MDT or an approved equal.




## Dimensional Data: Model 511A, Flanged Butterfly Valve 3" – 20"

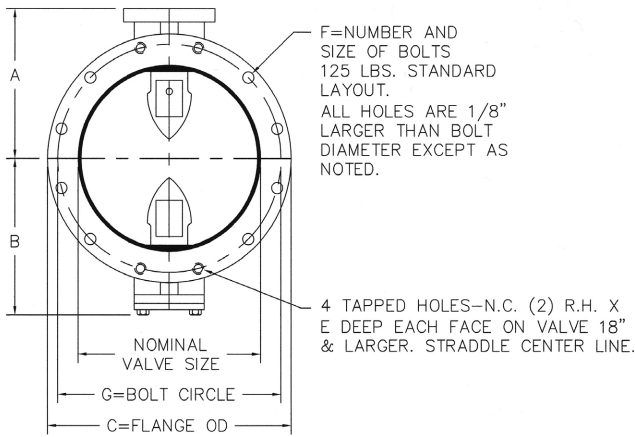


Nominal Valve

Size	A	B	C	D	E	F	G
3	4 <sup>3</sup> / <sub>4</sub>	3 <sup>7</sup> / <sub>8</sub>	7 <sup>1</sup> / <sub>2</sub>	5	<sup>3</sup> / <sub>4</sub>	4 - <sup>5</sup> / <sub>8</sub>	6
4	5 <sup>1</sup> / <sub>2</sub>	4 <sup>1</sup> / <sub>8</sub>	9	5	1 <sup>5</sup> / <sub>16</sub>	8 - <sup>5</sup> / <sub>8</sub>	7 <sup>1</sup> / <sub>2</sub>
6	6 <sup>1</sup> / <sub>2</sub>	5 <sup>1</sup> / <sub>8</sub>	11	5	1	8 - <sup>3</sup> / <sub>4</sub>	9 <sup>1</sup> / <sub>2</sub>
8	7 <sup>3</sup> / <sub>4</sub>	6 <sup>1</sup> / <sub>2</sub>	13 <sup>1</sup> / <sub>2</sub>	6	1 <sup>1</sup> / <sub>8</sub>	8 - <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>
10	9	9 <sup>7</sup> / <sub>8</sub>	16	8	1 <sup>3</sup> / <sub>16</sub>	12 - <sup>7</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>4</sub>
12	10 <sup>1</sup> / <sub>2</sub>	11 <sup>3</sup> / <sub>8</sub>	19	8	1 <sup>1</sup> / <sub>4</sub>	12 - <sup>7</sup> / <sub>8</sub>	17
14	11 <sup>7</sup> / <sub>8</sub>	12 <sup>3</sup> / <sub>4</sub>	21	8	1 <sup>3</sup> / <sub>8</sub>	12 - 1	18 <sup>3</sup> / <sub>4</sub>
16	13 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>8</sub>	23 <sup>1</sup> / <sub>2</sub>	8	1 <sup>7</sup> / <sub>16</sub>	16 - 1	21 <sup>1</sup> / <sub>4</sub>
18	14 <sup>3</sup> / <sub>8</sub>	15 <sup>1</sup> / <sub>4</sub>	25	8	1 <sup>9</sup> / <sub>16</sub>	16 - 1 <sup>1</sup> / <sub>8</sub>	22 <sup>3</sup> / <sub>4</sub>
20	16	16 <sup>7</sup> / <sub>8</sub>	27 <sup>1</sup> / <sub>2</sub>	8	1 <sup>11</sup> / <sub>16</sub>	20 - 1 <sup>1</sup> / <sub>8</sub>	25

All dimensions shown in inches

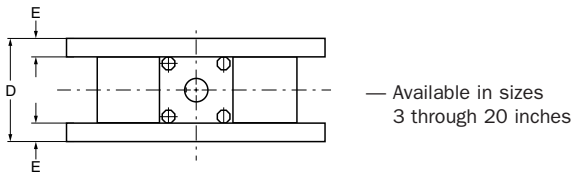

## Dimensional Data: Model 510A Mechanical Joint End Butterfly Valve — 4" – 20"

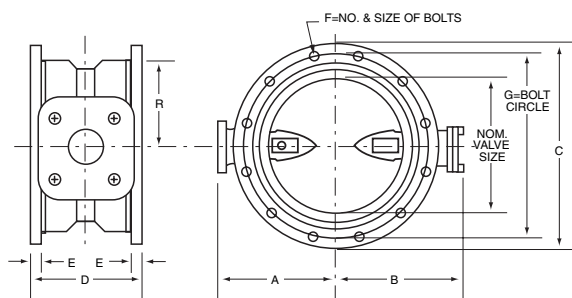

Nominal Valve

Size	A	B	C	D	E	F	G	X
4	5 <sup>1</sup> / <sub>2</sub>	3 <sup>1</sup> / <sub>2</sub>	9	8 <sup>1</sup> / <sub>8</sub>	1	4 - <sup>3</sup> / <sub>4</sub>	7 <sup>1</sup> / <sub>2</sub>	3 <sup>1</sup> / <sub>8</sub>
6	6 <sup>1</sup> / <sub>2</sub>	5 <sup>1</sup> / <sub>8</sub>	11	8 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>16</sub>	6 - <sup>3</sup> / <sub>4</sub>	9 <sup>1</sup> / <sub>2</sub>	3 <sup>1</sup> / <sub>2</sub>
8	7 <sup>3</sup> / <sub>4</sub>	6 <sup>1</sup> / <sub>2</sub>	13 <sup>1</sup> / <sub>4</sub>	8 <sup>5</sup> / <sub>8</sub>	1 <sup>1</sup> / <sub>8</sub>	6 - <sup>3</sup> / <sub>4</sub>	11 <sup>3</sup> / <sub>4</sub>	3 <sup>5</sup> / <sub>8</sub>
10	9	9 <sup>3</sup> / <sub>4</sub>	15 <sup>9</sup> / <sub>16</sub>	9 <sup>1</sup> / <sub>4</sub>	1 <sup>3</sup> / <sub>16</sub>	8 - <sup>3</sup> / <sub>4</sub>	14	4 <sup>1</sup> / <sub>4</sub>
12	10 <sup>1</sup> / <sub>2</sub>	11 <sup>3</sup> / <sub>8</sub>	17 <sup>15</sup> / <sub>16</sub>	9 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>4</sub>	8 - <sup>3</sup> / <sub>4</sub>	16 <sup>1</sup> / <sub>4</sub>	4 <sup>1</sup> / <sub>4</sub>
14	11 <sup>7</sup> / <sub>8</sub>	12 <sup>3</sup> / <sub>4</sub>	20 <sup>5</sup> / <sub>16</sub>	11 <sup>1</sup> / <sub>2</sub>	1 <sup>5</sup> / <sub>16</sub>	10 - <sup>3</sup> / <sub>4</sub>	18 <sup>3</sup> / <sub>4</sub>	4 <sup>1</sup> / <sub>2</sub>
16	13 <sup>1</sup> / <sub>2</sub>	14 <sup>1</sup> / <sub>2</sub>	22 <sup>9</sup> / <sub>16</sub>	12	1 <sup>3</sup> / <sub>8</sub>	12 - <sup>3</sup> / <sub>4</sub>	21	5
18	14 <sup>3</sup> / <sub>8</sub>	15 <sup>3</sup> / <sub>8</sub>	24 <sup>11</sup> / <sub>16</sub>	12 <sup>1</sup> / <sub>4</sub>	1 <sup>3</sup> / <sub>8</sub>	12 - <sup>3</sup> / <sub>4</sub>	23 <sup>1</sup> / <sub>4</sub>	5 <sup>1</sup> / <sub>4</sub>
20	16	17	27 <sup>3</sup> / <sub>32</sub>	12 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>2</sub>	14 - <sup>3</sup> / <sub>4</sub>	25 <sup>1</sup> / <sub>2</sub>	5 <sup>1</sup> / <sub>2</sub>

All dimensions shown in inches.

Mechanical joint end is in compliance with ANSI 21.11.

See Note 1.


PIPE SIZE	PIPE O.D.	PIPE I.D. MIN.
4	4.80	3.10
6	6.90	5.69
8	9.05	7.65
10	11.10	9.93
12	13.20	11.70
14	15.30	12.91
16	17.40	14.91
18	19.50	16.95
20	21.60	18.96

— Available in sizes 4 through 20 inches


Installation Diagram  
Note: The following items to be furnished by others unless otherwise specified in contract:  
Bolts, Glands, Nuts, Gaskets

# Actuator Dimensional Data for Models 511A and 510A — 20" and Smaller

## MDT Manual Actuator

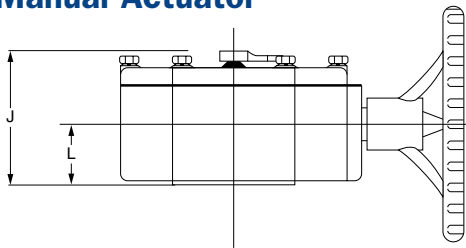

All dimensions shown in inches

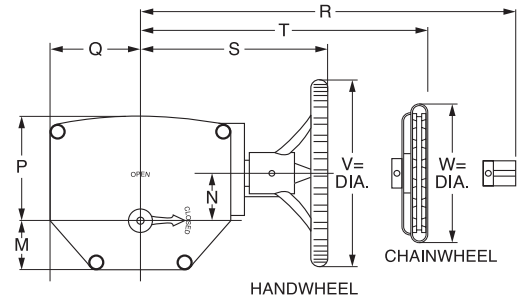

Valve Size	MDT Size	J	L	M	N	P	Q	R	S	T	V	W	# Turns to Close
3 to 12"	MDT-2	4 <sup>11</sup> / <sub>16</sub>	2	2 <sup>1</sup> / <sub>8</sub>	2	4 <sup>1</sup> / <sub>2</sub>	4 <sup>1</sup> / <sub>4</sub>	8 <sup>3</sup> / <sub>4</sub>	7 <sup>7</sup> / <sub>8</sub>	7 <sup>7</sup> / <sub>8</sub>	8	9 <sup>1</sup> / <sub>8</sub>	32
14, 16"	MDT-3	5 <sup>5</sup> / <sub>8</sub>	2 <sup>7</sup> / <sub>16</sub>	3 <sup>3</sup> / <sub>4</sub>	3 <sup>5</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub>	5 <sup>3</sup> / <sub>8</sub>	10 <sup>3</sup> / <sub>8</sub>	10 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>8</sub>	12	9 <sup>1</sup> / <sub>8</sub>	30
18, 20"	MDT-4	6 <sup>3</sup> / <sub>8</sub>	22 <sup>7</sup> / <sub>32</sub>	3 <sup>3</sup> / <sub>8</sub>	4	7 <sup>5</sup> / <sub>16</sub>	6 <sup>3</sup> / <sub>4</sub>	11 <sup>5</sup> / <sub>16</sub>	11 <sup>1</sup> / <sub>2</sub>	11	12	9 <sup>1</sup> / <sub>8</sub>	40

## Optional Accessories

Milliken offers a variety of actuator extensions to meet our customer's requirements. The choice of extension style is determined by the need for valve position indication, location of the actuator and application.

### Extension Stem with AWWA Nut

- Used to extend the 2" nut on a buried service actuator.

### Extension Bonnet

- Used to extend the actuator from the valve in situations when there may be space constraints, or it is not desirable to mount the actuator directly on the valve.
- Can be used for submerged service (such as reservoir inlet) and buried service applications.

### Indicating Handwheel Floorstand, Torque Tube Floorstand, Motor Actuator on Floorstand

- Choice of floorstands or torque tube floorstand are determined by the need for valve position indication and angular alignment.







### External Packing Bonnet

- There are two styles offered based on valve size. Both styles serve the same purpose; to allow for the valve packing to be replaced without removing the actuator.


### Stem Guide

- A stem guide is a support designed to restrict the bending of a long vertical pipe.

Extension Stem With 2" AWWA Nut

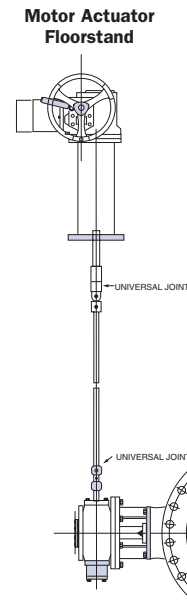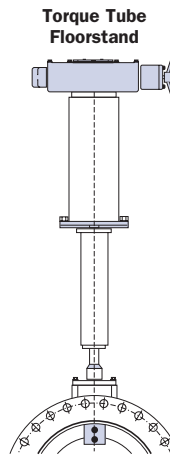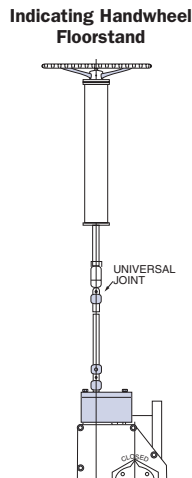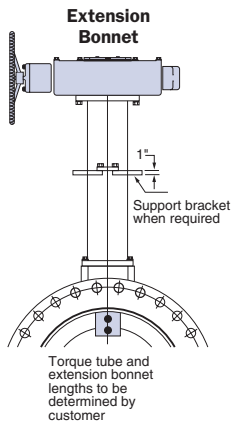



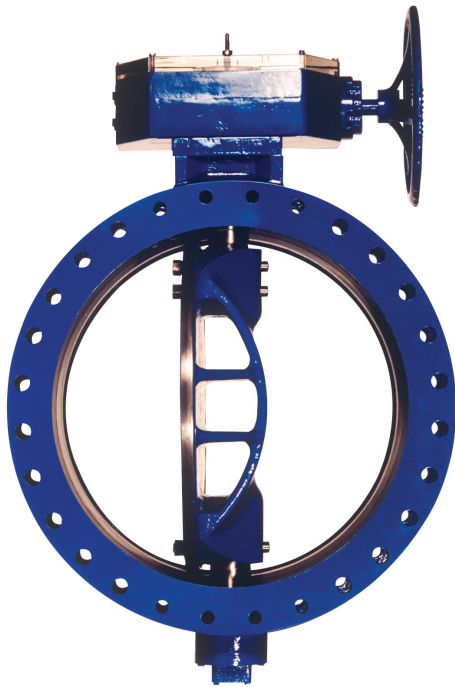

## Milliken Model 511 Flanged/ 510 Mechanical Joint

**Sizes:** 24 through 72 inches

**Body Styles:**

- Flanged (24" - 72")
- Mechanical Joint (24" - 48")

**Pressure Class:**

- Class 150B per AWWA Standard C504

**Actuation Options:**

- Handwheel
- Electric Motor
- Pneumatic or Hydraulic Cylinder
- Buried Service
- Chainwheel

**Materials of Construction:**

Body – ASTM A126 CLB cast iron

Disc – ASTM A536 Ductile Iron

Disc Edge – ASTM A276 Type 316 stainless steel

Seat – Buna N/EPDM rubber retained in the body

Seat Segments – ASTM A276 Type 316 stainless steel

Shaft – ASTM A276 Type 304 stainless steel

Bearings – Teflon lined fiberglass backed

Packing – Buna N/EPDM – V type packing

Paint – Liquid epoxy conforming to NSF 61 (lined and coated)

### Features and Benefits

Rubber seat in body

- Reduces the chance of seat damage from tuberculation or other solids

Recessed segmented seat retention

- Allows for simple bi-directional point adjustment on rubber seat while keeping hardware out of flowstream

Mechanically adjustable seat

- No special tools or training required to adjust and/or replace the seat


Epoxy paint

- Reduces potential corrosion and extends valve life

Flow through disc design

- Disc design results in lower head-loss than solid or hollow disc designs


**Figure 511**  
**24" - 72" Class 150 B Flanged Ends**

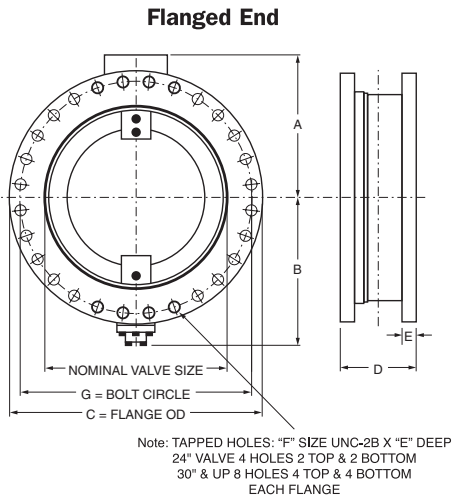

Valve Size	A	B	C	D	E	F	G
24	18 <sup>5</sup> / <sub>8</sub>	16 <sup>1</sup> / <sub>2</sub>	32	8	1 <sup>7</sup> / <sub>8</sub>	20 - 1 <sup>1</sup> / <sub>4</sub>	29 <sup>1</sup> / <sub>2</sub>
30	21 <sup>1</sup> / <sub>2</sub>	24 <sup>1</sup> / <sub>8</sub>	38 <sup>3</sup> / <sub>4</sub>	12	2 <sup>1</sup> / <sub>8</sub>	28 - 1 <sup>1</sup> / <sub>4</sub>	36
36	25 <sup>7</sup> / <sub>16</sub>	28	46	12	2 <sup>3</sup> / <sub>8</sub>	32 - 1 <sup>1</sup> / <sub>2</sub>	42 <sup>3</sup> / <sub>4</sub>
42	29 <sup>7</sup> / <sub>8</sub>	32 <sup>11</sup> / <sub>16</sub>	53	12	2 <sup>5</sup> / <sub>8</sub>	36 - 1 <sup>1</sup> / <sub>2</sub>	49 <sup>1</sup> / <sub>2</sub>
48	34 <sup>1</sup> / <sub>16</sub>	36 <sup>7</sup> / <sub>8</sub>	59 <sup>1</sup> / <sub>2</sub>	15	2 <sup>3</sup> / <sub>4</sub>	44 - 1 <sup>1</sup> / <sub>2</sub>	56
54	37 <sup>1</sup> / <sub>2</sub>	40 <sup>11</sup> / <sub>16</sub>	66 <sup>1</sup> / <sub>4</sub>	15	3	44 - 1 <sup>1</sup> / <sub>2</sub>	62 <sup>3</sup> / <sub>4</sub>
60	41 <sup>3</sup> / <sub>4</sub>	45 <sup>3</sup> / <sub>16</sub>	73	15	3 <sup>1</sup> / <sub>8</sub>	52 - 1 <sup>3</sup> / <sub>4</sub>	69 <sup>1</sup> / <sub>4</sub>
66	46 <sup>1</sup> / <sub>16</sub>	49 <sup>1</sup> / <sub>2</sub>	80	18	3 <sup>3</sup> / <sub>8</sub>	52 - 1 <sup>3</sup> / <sub>4</sub>	76
72	50	53 <sup>1</sup> / <sub>8</sub>	86 <sup>1</sup> / <sub>2</sub>	18	3 <sup>1</sup> / <sub>2</sub>	60 - 1 <sup>3</sup> / <sub>4</sub>	82 <sup>1</sup> / <sub>2</sub>

\*Contact Milliken for larger sizes


**Figure 510**  
**24" - 48" Class 150 B Mechanical Joint**

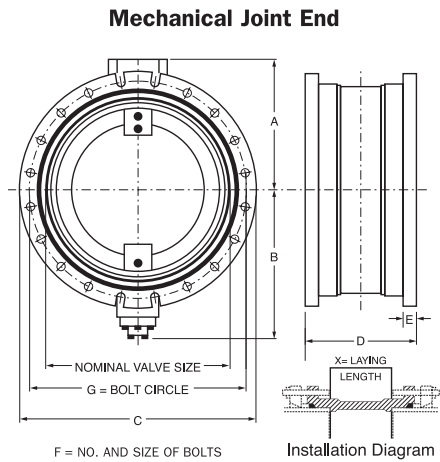

Valve Size	A	B	C	D	E	F	G	X
24	18 <sup>5</sup> / <sub>8</sub>	16 <sup>1</sup> / <sub>2</sub>	31 <sup>9</sup> / <sub>16</sub>	14 <sup>1</sup> / <sub>8</sub>	1 <sup>5</sup> / <sub>8</sub>	16 <sup>3</sup> / <sub>4</sub>	30	7 <sup>1</sup> / <sub>8</sub>
30	21 <sup>1</sup> / <sub>2</sub>	24 <sup>1</sup> / <sub>8</sub>	39	20	1 <sup>13</sup> / <sub>16</sub>	20 - 1	36 <sup>7</sup> / <sub>8</sub>	10
36	25 <sup>7</sup> / <sub>16</sub>	28	45 <sup>7</sup> / <sub>8</sub>	22	2	24 - 1	43 <sup>3</sup> / <sub>4</sub>	14
42	29 <sup>7</sup> / <sub>8</sub>	33	53	22	2	28 - 1 <sup>1</sup> / <sub>4</sub>	50 <sup>5</sup> / <sub>8</sub>	14
48	34 <sup>1</sup> / <sub>16</sub>	36 <sup>7</sup> / <sub>8</sub>	59 <sup>7</sup> / <sub>8</sub>	24	2	32 - 1 <sup>1</sup> / <sub>4</sub>	57 <sup>1</sup> / <sub>2</sub>	16

\*Contact Milliken for larger sizes

**Design Detail**

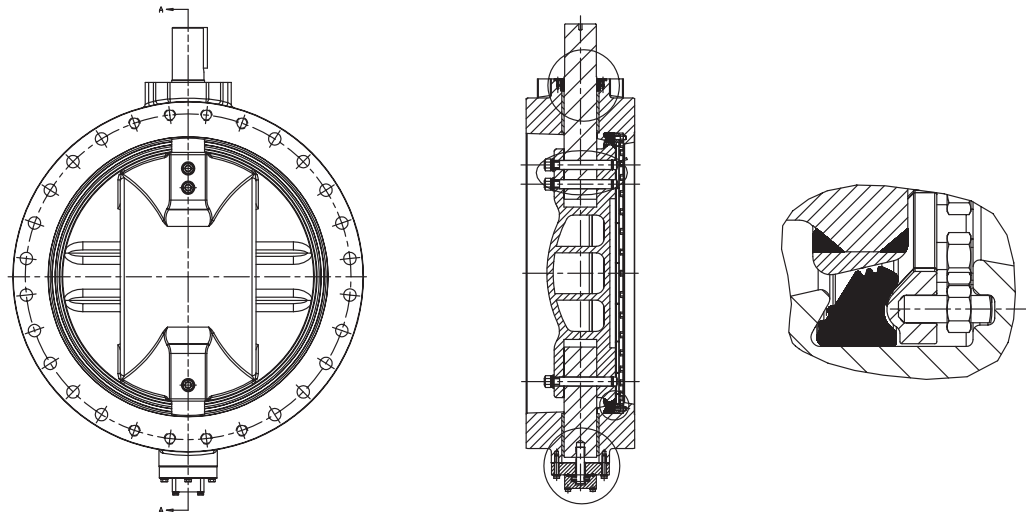

## Suggested Specification (24" and Larger)

### General:

All butterfly valves shall be of the tight closing, rubber seat type conforming to the design standards of ANSI/AWWA C504 latest revision. Valves shall be bubble-tight at the rated pressure in either direction and shall be suitable for throttling service and/or operation after long periods of inactivity. Manufacturer shall have a minimum of five (5) years experience producing AWWA butterfly valves.

### Body:

All valve bodies shall be constructed of ASTM A126 Class B cast iron. Flanged valves shall have ANSI B16.1 flanges with class 125# drilling. Mechanical Joint Valves shall have ends conforming to the ANSI/AWWA C111/A21.11 standard.

### Seat:

On 24" and larger valves the seat shall be adjustable and replaceable in the field without the use of special tools. Valve seats on valves 24" and larger will be designed for bi-directional adjustment without removal of the seat. Valve designs with the rubber seat on the disc are not acceptable.

### Disc:

The discs shall be constructed of ASTM A536 Ductile Iron with a 316 stainless steel edge. 24" and larger discs will be the flow through design.

### Shaft:

The valve shaft shall be constructed of stainless steel ASTM A276 type 304. On valves 24" and larger, a taper pin of 316 stainless steel will be used as the disc/shaft connection.

### Bearings:

All shaft bearing shall be of the self-lubrication, corrosion-resistant sleeve type. Bearings shall be designed for horizontal and/or vertical shaft loading.

### Packing:

On valves 24" and larger the packing will be V-type. All packing will be self adjusting and wear compensating. Valve packing arrangement shall be designed so that actuator removal will not result in packing seal failure.

### Paint:

Valves 24" and larger will be lined and coated with a liquid epoxy conforming to AWWA C550 and NSF61. Coatings will be a minimum of 8 mils DFT.




















### Testing:

All valves shall be hydrostatic and leak tested in accordance with ANSI/AWWA C504.

### Manual Actuators:

Manual actuators shall be AWWA approved worm gear actuators. The actuator incorporates a hardened worm with bronze heavy duty quadrant within a ductile iron housing. Gear must be self locking type and shall be designed to hold the valve in any intermediate position between fully open and fully closed without creeping or fluttering. Worm gear to be rated 450 foot pounds at the stops.

Valves shall be Milliken model 511/510 or approved equivalent.

<p><b>Series 600/601</b> Eccentric Plug Valve</p> <p>Welded Nickel Seat Stainless Steel Bearings ANSI-B16.1 Flanges Solid Ductile Iron Plug Low Pressure Drop Flanged &amp; MJ Ends Sizes 2"-72" FL Sizes 3"-48" MJ</p> <p>Flanged and MJ</p> 	<p><b>Series 601SS</b> Eccentric Plug Valve</p> <p>Integral Stainless Seat Stainless Bearings Stainless Steel Body ANSI B16.5 Class 150 Flanges Solid Stainless Steel Plug Low Pressure Drop Size: 1/2"-24"</p> 	<p><b>Series 601RL</b> Eccentric Plug Valve</p> <p>Soft or Hard Rubber Lining Stainless Steel Bearings ANSI B16.1 Flanges Solid Ductile Iron Plug Low Pressure Drop Sizes 3"-54" Metal Plugs Available - Consult Factory</p> <p>Rubber Lined</p> 	<p><b>Series 602</b> Eccentric Plug Valve</p> <p>Welded Nickel Seat Stainless Steel Bearings ANSI B16.1 Class 250 Flanges Solid Ductile Iron Plug Low Pressure Drop Sizes 2-1/2"-54"</p> <p>High Pressure</p> 
<p><b>Series 603</b> Eccentric Plug Valve</p> <p>Solid Ductile Iron Plug Round Port Low Pressure Drop Memory Stop NPT End Connections Sizes 1/2"-2"</p> <p>Threaded End</p> 	<p><b>Series 604E</b> Eccentric Plug Valve</p> <p>Epoxy Seat Solid Ductile Iron Plug Stainless Steel Bearings Low Pressure Drop Lift &amp; Turn NOT Required High Solids &amp; Flow Capacity Sizes 3"-16"</p> <p>Three Way Valve</p> 	<p><b>Series 606</b> Eccentric Plug Valve</p> <p>Welded Nickel Seat Stainless Steel Bearings AWWA C-606 Grooved Solid Ductile Iron Plug Low Pressure Drop Ductile or Steel Pipe Sizes 3"-24"</p> <p>Grooved End</p> 	<p><b>Series 611/610</b> Eccentric Plug Valve</p> <p>Ductile Iron Body ANSI B16.1 Flanges MJ AWWA C111 Welded Nickel Seat Solid Ductile Iron Plug Low Pressure Drop Sizes 2"-72" FL Sizes 3"-48" MJ</p> <p>Flanged and MJ</p> 
<p><b>Model 625</b> Eccentric Plug Valve</p> <p>Available in Threaded and Flanged Ends Rated for 175 psi Sizes 1/2"-4" UL/CGA Listed</p> 	<p><b>Series 8000</b> AWWA Swing Check</p> <p>Full waterway Weight or Spring Bronze/SS Body Seat Ring Bronze/Buna/EPDM disc insert Sizes 2"-36"</p> 	<p><b>Series 8500</b> AWWA Swing Check</p> <p>Full waterway Ductile Iron Construction Weight or Spring Air Cushion SS body seat ring Buna disc insert Sizes 3"-24"</p> 	<p><b>Series 9000</b> AWWA Swing Check</p> <p>Clear waterway Weight or Spring Air or Oil Cushion Bronze/SS Body seat ring Bronze/Buna/EPDM disc insert Sizes 3"-72"</p> 
<p><b>Model 720A</b> Wafer Check Valve</p> <p>Center Guided Check Valve Rated for 250 psi SS Disc/EPDM Seat Sizes 2"-12"</p> 	<p><b>Series 700</b> Wafer Check Valve</p> <p>ANSI Class 125/150 High Flow Capacity Narrow Face-to-Face Sizes 3"-12" 316 SS Internals Disc Position Indicator</p> <p>Wafer Check Valve</p> 	<p><b>Figure 851</b> Flex Check</p> <p>Million Cycle Certification Complete Ductile Iron Construction 285 psi Pressure Rating Fully Epoxy Lined Interior No Internal Shafts, Bearings or Bushings No External Levers, Weights or Springs Hard or Soft Rubberlining Available 2"-24" Size Range Backflush Devices Proximity Switches</p> 	<p><b>Figure 510A/511A</b> AWWA Butterfly Valve</p> <p>Complies with AWWA C-504 Class 150B Flanged or MJ Cast iron body and disc Seat in body Flow through disc on 24" and larger Epoxy Paint on all sizes standard 3" - 72"</p> 
<p><b>Figure 565/566</b> General Service Butterfly Valve</p> <p>Meets MSS SP 67 Cast Iron Body Bronze Disc Other Materials Upon Request Wrench or Gear Operated Available 2"-24" Size Range</p> 	<p><b>Figure 740A</b> Double Disc Check Valve</p> <p>Wafer pattern check valve rated for 250 psi. Available in sizes 2"-36" with a SS Disc/EPDM Seat</p> 	<p><b>Figure 821A</b> Globe Style Check Valve</p> <p>Center guided check valve. SS Disc/EPDM Seat and is available in sizes 2"-24".</p> 	<ul style="list-style-type: none"> <li>• <b>ISO 9001:2000 Certified</b></li> <li>• <b>Field Services Available</b></li> <li>• <b>Engineering Services</b></li> </ul>



Bethlehem, PA  
Phone (610) 861-8803  
Fax (610) 861-8094

[www.millikenvalve.com](http://www.millikenvalve.com)