

LVC Figure 53 Ductile Iron Resilient Seated Knife Gate Valve

675 Mitchell Avenue
Woodland, WA 98674
Phone: 360-225-1230
888-256-5779
Fax: 360-225-1235
www.henrypratt.com



Features

- Heavy duty cast ductile iron body, packing gland, and yoke for the most rugged service.
- Through bolting on side flange bolts allows easy installation.
- Easily replaceable natural rubber, EPDM, or BUNA-N seat provides a bi-directional drip tight seal across the gate from 0 to 150 PSI. Contact factory for service limits.
- Seat is flush with the bottom of the port eliminating pockets in the bottom of the valve that may collect material in media such as slurries, pellets or powders.
- Rubber seat has a molded-in steel reinforcement and is bolted in place to prevent shifting out of position by gate movement.
- Machined stainless steel gate provides corrosion resistance and durability.
- Easy conversion from handwheel operator to hydraulic or pneumatic cylinder, bevel gear, chain wheel, electric motor, or fail safe spring cylinder operator using existing cast yoke.
- Enclosed bronze stem nut provides reduced operating torque and is protected from harsh environments.
- Stainless steel stem resists corrosion.
- Full packing seal around gate minimizes the potential for packing leakage.
- MSS SP-81 and AWWA C520 face-to-face and flange dimensions.
- Minimum 4 bolt packing gland to ensure proper gland alignment in all valve sizes.
- Entire valve (inside and outside) is epoxy powder coated to provide corrosion resistance.
- CRN Registered


Materials of Construction

Model	53
1 Gate	SS
2 Body	DI
3 Seat	Natural Rubber*
4 Bolts	Stainless
5 Packing	TLSP**
6 Gland	DI
7 Stem	SS
8 Yoke	DI
9 Stem Nut	Bronze
10 Handwheel	DI

* Buna-N and EPDM seats also available

**TLSP = TFE Lubricated Synthetic Packing.

Normally supplied with handwheel for manual operation, but can be modified for chain wheel, bevel gear, fail safe spring cylinder, electric motor, hydraulic or pneumatic cylinder operator.

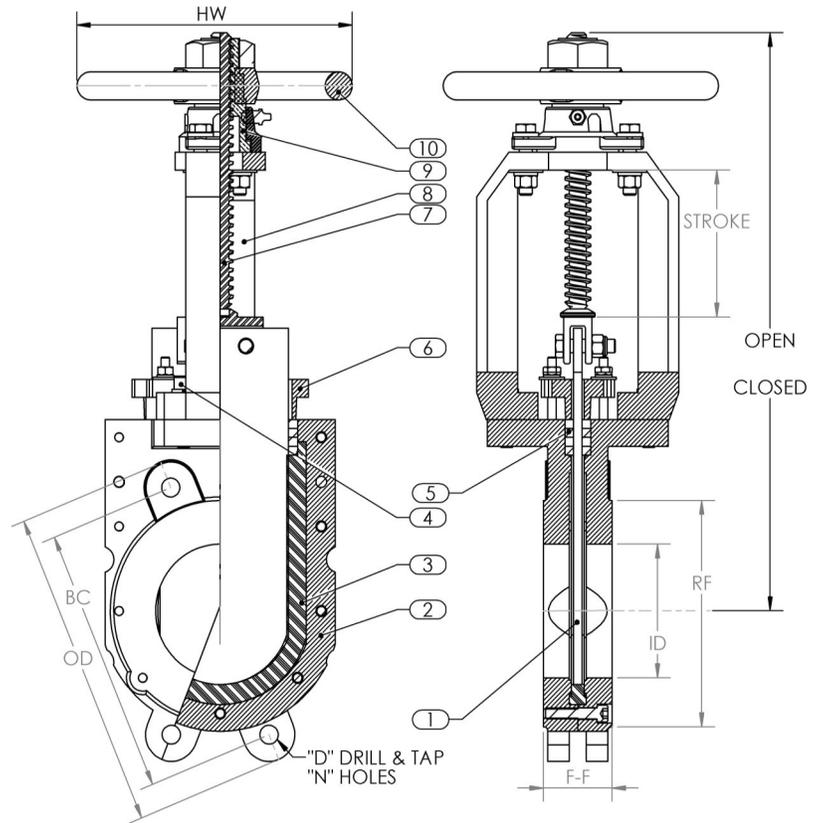

Dimensions (Inches) and Weights

	Size	2	3	4	6	8	10	12	14	16	18	20	24
Face-to-Face	F-F	1-7/8	2	2	2-1/4	2-3/4	2-3/4	3	3	3-1/2	3-1/2	4-1/2	4-1/2
Flange OD	OD	6	7-1/2	9	11	13-1/2	16	19	21	23-1/2	25	27-1/2	32
Bolt Circle	BC	4-3/4	6	7-1/2	9-1/2	11-3/4	14-1/4	17	18-3/4	21-1/4	22-3/4	25	29-1/2
Flanged Raised Face	RF	4-1/8	5	6-3/16	8-1/2	10-5/8	12-3/4	15	17	18-1/2	21	23	27-1/4
Inside Diameter	ID	2	3-1/8	4	6	8	10	12	13-3/4	15-3/4	17-3/4	19-11/16	23-5/8
No. of Bolt Holes	N	4	4	8	8	8	12	12	12	16	16	20	20
Hole D&T Size	D	5/8"-11	5/8"-11	5/8"-11	3/4"-10	3/4"-10	7/8"-9	7/8"-9	1"-8	1"-8	1-1/8"-7	1-1/8"-7	1-1/4"-7
C/L to Top-Closed	H-CLS	13	14-3/4	16-9/16	20-1/2	24-1/4	29	34-5/8"	39	43	47-1/2	51-7/8	60
C/L to Top-Open	H-OPN	15	17-3/4	20-9/16	26-1/2	32-1/2	39-1/4	47	54-1/4	59	65-1/2	71-13/16	83-7/8
Handwheel Dia.	H/W	8	8	8	12	12	16	20	24	24	24	24	24
Weight - lbs	WT	24	34	40	84	116	170	258	308	418	516	702	932
Stroke	S	2	3	4	6	8-1/4	10-1/4	12-3/8	14-1/4	16	18	19-15/16	23-7/8

The trademarks, logos and service marks displayed in this document herein are the property of Henry Pratt Company, LLC, its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com.

Copyright © 2016 Henry Pratt Company, LLC. All Rights Reserved.

Form 13243 9/2016